


LMKS, LMF, LBF,
LMS, LBS & LHP SERIES

200 mm Submersible Pumpset
50 Hz



PUMPS

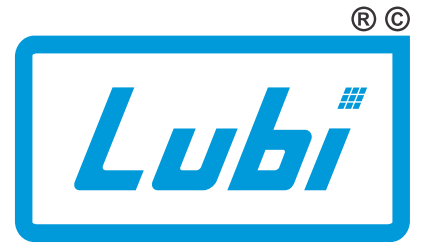

QUALITY • INNOVATION • SUSTAINABILITY

200 mm

8" Borewell Submersible Pumpsets



Description

LUBI's Submersible pumpsets are made out of premium quality of raw material and workmanship to ensure that pump is energy efficient, reliable and has a very long service life with negligible repairing.

Lubi Submersibles Pumpsets are manufactured as per IS : 8034 & IS : 9283 strict quality control for year of efficient & reliable operation.

Salient Features

- All components are manufactured from materials as per Indian Standard Specifications. They are precisely machined on modern machines, Including CNC machines to give you years of reliable operation.
- The motors are designed to start at low voltage & working in a wide voltage fluctuation.
- Motors have well designed sleeve and thrust bearings for longer life.
- Motor Stator & Rotor are vacuum impregnated and coated properly to ensure corrosion resistance.
- High operating efficiencies of pumpset result into high water discharge rate and lower power consumption.
- All rotating components and assemblies are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- The Pumpsets are compact and slim and can be easily installed in narrow wells.
- Power consumption & operating cost is less due to high pump efficiency.
- All pumps are equipped with a reliable non-return valve to reduce water hammer & Friction losses.

Material of Construction

Motor Body	: Stainless Steel Mild Steel
Stator	: Vacuum Impregnated and epoxy coated for corrosion resistance. Thick end laminations are provided to protect motor windings.
Rotor	: Vacuum impregnated, shot blasted & coated with poly urethane colour for corrosion resistance & dynamically balanced for vibration free smooth operation
Windings	: PVC / Polyster insulated, water cooled
Journal Bearings	: Leaded Bronze / Nitrile Rubber and Stainless Steel, Water Lubricated, having high load bearing capacity.
Thrust Bearings	: Carbon Vs. Steel segment special self-aligning and water lubricated to withstand high axial thrust loads.
Pressure Equalizing Diaphragm	: Adequately sized to accommodate expansion of water inside the motor and prevent loss of cooling water.
Impeller	: High quality abrasion resistant Bronze / Stainless Steel & dynamically balanced.
Bowl	: High grade Cast Iron Stainless Steel Investment Casted.
Wear Rings	: High quality abrasion resistant Bronze / Nitrile Rubber
Shaft	: Stainless Steel of adequate diameter to ensure rigidity and ground to close tolerances.
Suction Casing	: Provided with perforated Stainless Steel Strainer and adequately sized to allow the water to be sucked in with minimum friction.
Cable Sealing Arrangement	: Designed so that no borewell water with sand can enter the motor.

Applications

- Irrigation of Fields / Farms
- High-rise Buildings
- Community Water Supply
- Housing Complexes
- Industries
- Bungalows

8" Submersible pumpsets for 200 mm. DIA. Bore well (196 mm. Max DIA.) RADIAL FLOW

LMKS-150 Outlet size 75mm. (3") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.					
				0	180	220	300	400	480
				Head in Metres					
LMKS-150	5	5.50	7.50	91	85	83	75	60	44
LMKS-150	7	7.50	10.0	127	119	116	105	84	62
LMKS-150	8	9.30	12.5	146	136	132	120	96	70
LMKS-150	10	11.0	15.0	182	170	165	150	120	88
LMKS-150	12	13.0	17.5	218	204	198	180	144	106
LMKS-150	13	15.0	20.0	237	221	215	195	156	114
LMKS-150	17	18.5	25.0	309	289	281	255	204	150
LMKS-150	20	22.0	30.0	364	340	330	300	240	176

LMKS-200 Outlet size 75mm. (3") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.							
				0	225	350	450	520	610	710	
				Head in Metres							
LMKS-200	5	7.50	10.0	93	87	83	75	65	50	25	
LMKS-200	6	9.30	12.5	112	104	99	90	77	60	30	
LMKS-200	7	11.0	15.0	130	121	116	105	90	70	35	
LMKS-200	8	13.0	17.5	149	138	132	120	103	80	40	
LMKS-200	9	13.0	17.5	167	156	149	135	116	90	45	
LMKS-200	10	15.0	20.0	186	173	165	150	129	100	50	
LMKS-200	12	18.5	25.0	223	208	198	180	155	120	60	
LMKS-200	13	18.5	25.0	242	225	215	195	168	130	65	
LMKS-200	14	22.0	30.0	260	242	231	210	181	140	70	
LMKS-200	15	22.0	30.0	279	260	248	225	194	150	75	
LMKS-200	17	26.0	35.0	316	294	281	255	219	170	85	
LMKS-200	20	30.0	40.0	372	346	330	300	258	200	100	

LMKS-250 Outlet size 75mm. (3") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	250	425	500	650	800	850
				Head in Metres						
LMKS-250*	3	5.50	7.50	57	54	51	47	35	18	11
LMKS-250*	4	7.50	10.0	75	72	69	62	46	24	14
LMKS-250*	5	9.30	12.5	94	90	86	78	58	29	18
LMKS-250*	6	11.0	15.0	113	108	103	93	69	35	21
LMKS-250*	7	15.0	20.0	132	126	120	109	81	41	25
LMKS-250*	8	15.0	20.0	151	144	137	124	92	47	28
LMKS-250	10	18.5	25.0	189	180	171	155	115	59	35
LMKS-250	12	22.0	30.0	226	216	206	186	138	71	42
LMKS-250	14	26.0	35.0	264	252	240	217	161	82	49
LMKS-250	16	30.0	40.0	302	288	274	248	184	94	56
LMKS-250	18	33.0	45.0	339	324	308	279	207	106	63
LMKS-250	20	37.0	50.0	377	360	343	310	230	118	70

LMKS-300 Outlet size 75mm. (3") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.							
				0	300	520	650	750	840	900	
				Head in Metres							
LMKS-300*	3	7.50	10.0	57	53	51	45	36	25	15	
LMKS-300*	4	9.30	12.5	75	70	68	60	48	33	20	
LMKS-300*	5	11.0	15.0	94	88	85	75	60	41	25	
LMKS-300*	6	15.0	20.0	113	105	102	90	72	50	30	
LMKS-300*	7	15.0	20.0	132	123	119	105	84	58	35	
LMKS-300	8	18.5	25.0	151	140	136	120	96	66	40	
LMKS-300	10	22.0	30.0	189	175	170	150	120	83	50	
LMKS-300	12	26.0	35.0	226	210	204	180	144	99	60	
LMKS-300	12	30.0	40.0	226	210	204	180	144	99	60	
LMKS-300	13	30.0	40.0	245	228	221	195	156	107	65	
LMKS-300	15	33.0	45.0	283	263	255	225	180	124	75	
LMKS-300	15	37.0	50.0	283	263	255	225	180	124	75	
LMKS-300	16	37.0	50.0	302	280	272	240	192	132	80	
LMKS-300	18	40.0	55.0	339	315	306	270	216	149	90	
LMKS-300	20	45.0	60.0	377	350	340	300	240	165	100	

Note :

- All pumps with * are ISI marked.
- Please select pumps in the range of discharge shown in bold figure.
- All V8 motors are ISI as per ISI : 9283. [12.5 HP to 60 HP, **Except 17.5 HP**].

8" Submersible pumpsets for 200 mm. DIA. Bore well (196 mm. Max DIA.) RADIAL FLOW

LMKS-350 Outlet size 75mm. (3") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	400	650	750	850	920	1050
				Head in Metres						
LMKS-350	3	7.50	10.0	59	53	48	45	39	34	21
LMKS-350	4	11.0	15.0	78	70	64	60	52	45	28
LMKS-350	5	13.0	17.5	98	88	80	75	65	57	35
LMKS-350	6	15.0	20.0	117	105	96	90	78	68	42
LMKS-350	7	18.5	25.0	137	123	112	105	91	79	49
LMKS-350	8	22.0	30.0	156	140	128	120	104	91	56
LMKS-350	9	22.0	30.0	176	158	144	135	117	102	63
LMKS-350	10	26.0	35.0	195	175	160	150	130	113	70
LMKS-350	11	30.0	40.0	215	193	176	165	143	125	77
LMKS-350	12	30.0	40.0	234	210	192	180	156	136	84
LMKS-350	14	37.0	50.0	273	245	224	210	182	159	98
LMKS-350	15	41.0	55.0	293	263	240	225	195	170	105
LMKS-350	16	41.0	55.0	312	280	256	240	208	181	112
LMKS-350	17	45.0	60.0	332	298	272	255	221	193	119

LMKS-400 Outlet size 75mm. (3") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	400	700	850	950	1050	1150
				Head in Metres						
LMKS-400*	2	5.50	7.50	39	37	34	30	24	17	10
LMKS-400*	3	9.30	12.5	58	55	51	45	36	25	15
LMKS-400*	4	11.0	15.0	78	73	68	60	48	34	20
LMKS-400*	5	15.0	20.0	97	91	85	75	60	42	25
LMKS-400	6	18.5	25.0	117	110	102	90	72	50	30
LMKS-400	7	22.0	30.0	136	128	119	105	84	59	35
LMKS-400	8	22.0	30.0	156	146	136	120	96	67	40
LMKS-400	9	26.0	35.0	175	164	153	135	108	75	45
LMKS-400	10	30.0	40.0	194	183	170	150	120	84	50
LMKS-400	12	37.0	50.0	233	219	204	180	144	101	60
LMKS-400	14	40.0	55.0	272	256	238	210	168	117	70
LMKS-400	15	45.0	60.0	292	274	255	225	180	126	75

LMKS-500 Outlet size 75mm. (3") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	400	700	1000	1150	1300	1380
				Head in Metres						
LMKS-500	2	7.50	10.0	42	40	37	30	25	18	12
LMKS-500	3	11.0	15.0	63	60	55	45	38	27	18
LMKS-500	4	15.0	20.0	84	80	73	60	50	36	24
LMKS-500	5	18.5	25.0	105	100	91	75	63	45	30
LMKS-500	6	22.0	30.0	126	120	110	90	75	54	36
LMKS-500	7	26.0	35.0	147	140	128	105	88	63	42
LMKS-500	8	30.0	40.0	168	160	146	120	100	72	48
LMKS-500	9	33.0	45.0	189	180	164	135	113	81	54
LMKS-500	10	37.0	50.0	210	200	183	150	125	90	60
LMKS-500	11	41.0	55.0	231	220	201	165	138	99	66
LMKS-500	12	45.0	60.0	252	240	219	180	150	108	72

Note :

- All pumps with * are ISI marked.
- Please select pumps in the range of discharge shown in bold figure.
- All V8 motors are ISI as per ISI : 9283. [12.5 HP to 60 HP, **Except 17.5 HP**].

8" Submersible pumpsets for 200 mm. DIA. Bore well (196 mm. Max DIA.) MIXED FLOW

LMF-30 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.								
				0	450	600	750	950	1100	1175		
				Head in Metres								
LMF-30 *	3	7.50	10.0	56	50	47	45	39	29	13		
LMF-30 *	4	9.30	12.5	74	67	63	60	52	38	17		
LMF-30 *	5	11.0	15.0	93	84.0	79	75	65	48	21		
LMF-30 *	6	15.0	20.0	111	101	95	90	78	58	26		
LMF-30 *	7	15.0	20.0	130	118	111	105	91	67	30		
LMF-30	8	18.5	25.0	148	134	126	120	104	77	34		
LMF-30	10	22.0	30.0	185	168	158	150	130	96	43		
LMF-30	12	26.0	35.0	222	202	190	180	156	115	51		

Note : LMF-30 & 40 ISI models are supplied with 3" outlet.

LMF-50 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.								
				0	650	1000	1175	1350	1500	1600		
				Head in Metres								
LMF-50 *	2	7.50	10.0	42	35	32	30	27	24	18		
LMF-50	3	11.0	15.0	63	53	48	45	41	36	27		
LMF-50 *	4	15.0	20.0	84	71	64	60	55	48	36		
LMF-50	5	18.5	25.0	105	88	80	75	68	60	45		
LMF-50	6	22.0	30.0	126	106	96	90	82	72	54		
LMF-50	7	26.0	35.0	147	123	112	105	96	84	63		
LMF-50	8	30.0	40.0	168	141	128	120	109	96	72		
LMF-50	9	33.0	45.0	189	159	144	135	123	108	81		
LMF-50	10	37.0	50.0	210	176	160	150	137	120	90		
LMF-50	11	40.0	55.0	231	194	176	165	150	132	99		
LMF-50	12	45.0	60.0	252	212	192	180	164	144	108		

LBF-70 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.								
				0	900	1150	1450	1750	2000	2150		
				Head in Metres								
LBF-70*	2	11.0	15.0	45	37	34	30	25	20	14		
LBF-70*	3	15.0	20.0	67	56	51	45	38	30	21		
LBF-70	4	22.0	30.0	89	75	68	60	51	40	28		
LBF-70	5	26.0	35.0	112	93	85	75	63	50	35		
LBF-70	6	30.0	40.0	134	112	102	90	76	60	42		
LBF-70	7	37.0	50.0	156	131	119	105	89	70	49		
LBF-70	8	40.0	55.0	179	149	136	120	101	80	56		
LBF-70	8	45.0	60.0	179	149	136	120	101	80	56		
LBF-70	9	45.0	60.0	201	168	153	135	114	90	63		

LMF-40 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.								
				0	525	800	1000	1275	1550	1630		
				Head in Metres								
LMF-40 *	2	5.50	7.50	41	35	32	30	26	20	16		
LMF-40 *	3	9.30	12.5	62	53	49	45	39	30	24		
LMF-40 *	4	11.0	15.0	82	70	65	60	52	40	32		
LMF-40 *	5	15.0	20.0	103	88	81	75	65	50	40		
LMF-40	6	18.5	25.0	123	106	97	90	78	60	48		
LMF-40	7	22.0	30.0	144	123	113	105	91	70	56		
LMF-40	8	22.0	30.0	164	141	130	120	104	80	64		
LMF-40	8	26.0	35.0	164	141	130	120	104	80	64		
LMF-40	10	30.0	40.0	205	176	162	150	130	100	80		
LMF-40	12	37.0	50.0	246	211	194	180	156	120	96		

LMF-60 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.								
				0	525	875	1325	1500	1800	1875		
				Head in Metres								
LMF-60 *	2	9.30	12.5	42	40	36	30	27	22	16		
LMF-60 *	3	15.0	20.0	63	60	54	45	40	33	24		
LMF-60	4	18.5	25.0	84	80	72	60	54	44	32		
LMF-60	5	22.0	30.0	105	100	90	75	67	55	40		
LMF-60	6	26.0	35.0	126	120	108	90	80	66	48		
LMF-60	6	30.0	40.0	126	120	108	90	80	66	48		
LMF-60	7	30.0	40.0	147	140	126	105	94	77	56		
LMF-60	7	33.0	45.0	147	140	126	105	94	77	56		
LMF-60	8	37.0	50.0	168	160	144	120	107	88	64		
LMF-60	10	45.0	60.0	210	200	180	150	134	110	80		

LBF-80 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.								
				0	1100	1400	1600	1900	2200	2400		
				Head in Metres								
LBF-80*	2	11.0	15.0	46	38	34	30	24	16	10		
LBF-80	3	18.5	25.0	69	57	51	45	36	24	15		
LBF-80	4	22.0	30.0	92	76	68	60	48	32	20		
LBF-80	5	30.0	40.0	115	95	85	75	60	40	25		
LBF-80	6	37.0	50.0	138	114	102	90	72	48	30		
LBF-80	7	40.0	55.0	161	133	119	105	84	56	35		
LBF-80	7	45.0	60.0	161	133	119	105	84	56	35		
LBF-80	8	45.0	60.0	184	152	136	120	96	64	40		

Note :

- All pumps with * are ISI marked.
- Please select pumps in the range of discharge shown in bold figure.
- All V8 motors are ISI as per ISI : 9283. [12.5 HP to 60 HP, **Except 17.5 HP**].

8" Submersible pumpsets for 200 mm. DIA. Bore well (196 mm. Max DIA.) MIXED FLOW

LBF-81 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	950	1230	1400	1640	1800	1930
				Head in Metres						
LBF-81	2	11.0	15.0	56	46	42	39	34	30	20
LBF-81	3	18.5	25.0	84	69	63	59	51	45	30
LBF-81	4	26.0	35.0	112	92	84	78	68	60	40
LBF-81	5	30.0	40.0	140	115	105	98	85	75	50
LBF-81	6	37.0	50.0	168	138	126	117	102	90	60
LBF-81	7	45.0	60.0	196	161	147	137	119	105	70

LBF-100 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	1350	1650	2000	2280	2480	2550
				Head in Metres						
LBF-100 *	2	15.0	20.0	49	40	35	30	24	17	8
LBF-100	3	22.0	30.0	74	60	53	45	36	26	12
LBF-100	4	30.0	40.0	98	80	71	60	48	34	16
LBF-100	5	37.0	50.0	123	100	88	75	60	43	20
LBF-100	6	45.0	60.0	147	120	106	90	72	51	24

LBF-101 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	1275	1400	1600	1850	2050	2200
				Head in Metres						
LBF-101	2	15.0	20.0	57	44	42	39	35	30	20
LBF-101	3	22.0	30.0	86	66	63	59	52	45	30
LBF-101	4	30.0	40.0	114	88	84	78	70	60	40
LBF-101	5	37.0	50.0	143	110	106	98	87	75	50
LBF-101	6	45.0	60.0	172	132	127	117	104	89	60

LBF-125 Outlet size 125mm. (5") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	1550	1950	2200	2350	2600	2650
				Head in Metres						
LBF-125	1	9.30	12.5	24	20	18	16	14	9	7
LBF-125	2	18.5	25.0	49	40	36	32	28	18	14
LBF-125	3	30.0	40.0	74	60	54	48	42	27	21
LBF-125	4	37.0	50.0	99	80	72	64	56	36	28
LBF-125	5	45.0	60.0	123	100	90	80	70	45	35

Note : ■ All pumps with * are ISI marked.

■ Please select pumps in the range of discharge shown in bold figure.

■ All V8 motors are ISI as per ISI : 9283. [12.5 HP to 60 HP, Except 17.5 HP].

8" Submersible pumpsets Coupled with 6" Motor for 200 mm. DIA. Borewell JANTA MODEL

LMS-30AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	300	600	900	1200	1500	1800
				Head in Metres						
LMS-30AF	2	4.50	6.00	36	34	30	27	24	20	11
LMS-30AF	3	7.50	10.0	54	51	45	41	36	30	17
LMS-30AF	4	9.30	12.5	72	68	60	54	48	40	22
LMS-30AF	5	11.0	15.0	90	85	75	68	60	50	28

LMS-40AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	450	750	1050	1280	1650	1800
				Head in Metres						
LMS-40AF	2	7.50	10.0	43	36	32	28	24	13	8
LMS-40AF	3	9.30	12.5	65	54	48	42	36	20	12
LMS-40AF	4	11.0	15.0	86	72	64	56	48	26	16
LMS-40AF	5	15.0	20.0	108	90	80	70	60	33	20

LMS-50AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	825	1125	1300	1500	1875	2025
				Head in Metres						
LMS-50AF	2	7.50	10.0	43	36	32	28	24	13	8
LMS-50AF	3	11.0	15.0	65	54	48	42	36	20	12
LMS-50AF	4	15.0	20.0	86	72	64	56	48	26	16
LMS-50AF	5	18.5	25.0	108	90	80	70	60	33	20

LMS-60AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	975	1325	1500	1725	2100	2200
				Head in Metres						
LMS-60AF	2	9.30	12.5	43	36	32	28	24	13	8
LMS-60AF	3	13.0	17.5	65	54	48	42	36	20	12
LMS-60AF	4	18.5	25.0	86	72	64	56	48	26	16

8" Submersible pumpsets Coupled with 6" Motor for 200 mm. DIA. Borewell

JANTA MODEL

LBS-70AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	1100	1350	1550	1775	2150	2250
				Head in Metres						
LBS-70AF	2	11.0	15.0	45	36	32	28	24	13	8
LBS-70AF	3	15.0	20.0	68	54	48	42	36	20	12
LBS-70AF	4	22.0	30.0	90	72	64	56	48	26	16

LBS-81AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	950	1230	1400	1640	1800	1930
				Head in Metres						
LBS-81AF	2	11.0	15.0	56	46	42	39	34	30	20
LBS-81AF	3	18.5	25.0	84	69	63	59	51	45	30

LBS-101AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.							
				0	250	1275	1400	1600	1850	2050	2200
				Head in Metres							
LBS-101AF	2	15.0	20	57	56	44	42	39	35	30	20
LBS-101AF	3	22.0	30	86	83	66	63	59	52	45	30

Note :

- All pumps with * are ISI marked.
- Please select pumps in the range of discharge shown in bold figure.

LBS-80AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	850	1400	1600	1825	2200	2300
				Head in Metres						
LBS-80AF	2	11.0	15.0	46	40	32	28	24	13	8
LBS-80AF	3	18.5	25.0	69	60	48	42	36	20	1

LBS-100AF Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	900	1500	2000	2200	2320	2500
				Head in Metres						
LBS-100AF	2	15.0	20.0	54	48	40	30	24	20	10
LBS-100AF	3	22.0	30.0	81	72	60	45	36	30	15

LBS-125AF Outlet size 125mm. (5") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.						
				0	1000	1600	2100	2300	2420	2600
				Head in Metres						
LBS-125AF	1	9.30	12.5	27	24	20	15	12	10	5
LBS-125AF	2	18.5	25.0	54	48	40	30	24	20	10

8" Submersible pumpsets for 200 mm. DIA. Bore well (196 mm. Max DIA.) MIXED FLOW

LPH-70 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.							
				0	1500	1980	2380	2550	2720	2880	3000
				Head in Metres							
LPH-70	2	11.0	15.0	38	30	25	20	17	15	13	10
LPH-70	3	15.0	20.0	57	45	38	30	26	23	19	15
LPH-70	4	18.5	25.0	76	60	50	40	34	30	25	20
LPH-70	4	22.0	30.0	76	60	50	40	34	30	25	20
LPH-70	5	26.0	35.0	95	75	63	50	43	38	31	25
LPH-70	6	30.0	40.0	114	90	75	60	51	45	38	30

Note :

- Please select pumps in the range of discharge shown in bold figure.
- All V8 motors are ISI as per ISI : 9283. [12.5 HP to 60 HP, **Except 17.5 HP**].

LPH-80 Outlet size 100mm. (4") n = 2880 rpm

Pump Type	Stage	K.W.	H.P.	Discharge in L.P.M.							
				0	1650	2200	2600	2800	3000	3150	3375
				Head in Metres							
LPH-80	2	11.0	15.0	41	30	25	20	18	15	13	10
LPH-80	3	18.5	25.0	62	45	38	30	26	23	19	15
LPH-80	4	22.0	30.0	82	60	50	40	35	30	25	20
LPH-80	5	30.0	40.0	103	75	63	50	44	38	31	25
LPH-80	6	37.0	50.0	123	90	75	60	53	45	38	30

LUBI INDUSTRIES LLP

Near Kalyan Mills, Naroda Road, Ahmedabad-380 025, INDIA.
Phone : +91 - 79 - 61700100, Fax No. :+91 - 79 - 61700399.

Sales Enquiries: mktsales@lubipumps.com
www.lubipumps.com

Product Improvement is a continuous process at 'LUBI'. The data given in this publication is therefore subject to revision.



ISO 9001



ISO 14001

Customer Care Number : 09824200800